


Positioning system QSZ 60, 80, 100, 125

Specifications

Belt drive

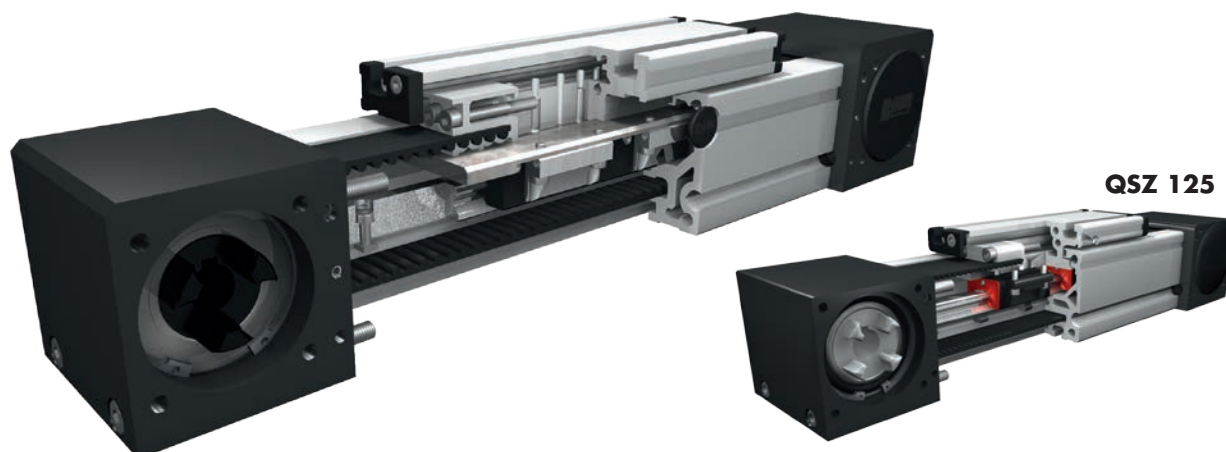

Function:

This unit consists of a square aluminium profile with an integrated ball rail. The carriage is moved by a belt drive. Each standard pulley includes one coupling claw on one side. Belt tension can be readjusted by a simple screw adjustment device in the carriage. This device can also be used for symmetrical adjustment of two or more linear units running parallel.

Fitting position:

As required. Max. length 6.000 mm without joints.

Carriage mounting:

By T-slots.

Unit mounting:

By T-slots and mounting sets. The linear axis can be combined with any T-slot profile.


Belt performance:

HTD with steel reinforcement, no backlash when changing direction, repeatability $\pm 0,1$ mm.

Carriage support:

In the standard version, the carriage runs on two runner blocks which can be adjusted and serviced at a central servicing position. For longer carriages the number of runner blocks can be increased.

Forces and torques



Size	60		80		100		125	
permitted dyn. forces*	5000 km	10000 km	5000 km	10000 km	5000 km	10000 km	5000 km	10000 km
F _x [N]	894	800	1900	1800	4000	3800	5900	5750
F _y [N]	1410	990	3570	2550	4080	2900	6892	5470
F _z [N]	3520	2500	8500	6050	10300	7270	17205	13659
M _x [Nm]	33	23	107	75	142	101	288	228
M _y [Nm]	104	73	310	222	439	311	1110	881
M _z [Nm]	100	70	296	210	412	292	1012	803
C [N]	7800		18800		22800		31700	
All forces and torques related to the following:								
existing values	$\frac{F_y}{F_{y_{dyn}}} + \frac{F_z}{F_{z_{dyn}}} + \frac{M_x}{M_{x_{dyn}}} + \frac{M_y}{M_{y_{dyn}}} + \frac{M_z}{M_{z_{dyn}}} \leq 1$							
table values								
No-load torque								
Nm	1,0		1,4		1,8			
Speed								
(m/s) max	5		5		5		5	
Tensile force								
permanent [N]	900		1900		4000		5900	
0,2 s [N]	1000		2090		4300		6350	
Geometrical moments of inertia of aluminium profile								
I _x mm ⁴	4,3x10 ⁵		16,5x10 ⁵		43,0x10 ⁵		74,9x10 ⁵	
I _y mm ⁴	4,8x10 ⁵		18,7x10 ⁵		48,8x10 ⁵		106,5x10 ⁵	
Elastic modulus N/mm ²	70000		70000		70000		70000	

* referred to lifetime

Formula: QSZ

Driving torque:

$$M_a = \frac{F \cdot p \cdot S_s}{2000 \cdot \pi} + M_{leer}$$

$$P_a = \frac{M_a \cdot n}{9550}$$

F = force (N)
 P = pulley action perimeter (mm)
 S_s = safety factor 1,2 ... 2
 M_{leer} = no-load torque (Nm)
 n = rpm pulley (min⁻¹)
 M_a = driving torque (Nm)
 P_a = motor power (KW)

Deflection:

$$f = \frac{F \cdot L^3}{E \cdot I \cdot 192}$$

f = deflection (mm)
 F = load (N)
 L = free length (mm)
 E = elastic modulus 70000 (N/mm²)
 I = second moment of area (mm⁴)


Nominal lifetime:

$$L = \left(\frac{C}{F} \right)^3 \times 10^5$$





L = lifetime in meters
 C = dynamic load factor (N)
 F = medium load (N)

Positioning system QSZ 60, 80, 100, 125


Dimensions (mm)



Increasing the carriage length will increase the basic length by the same amount.

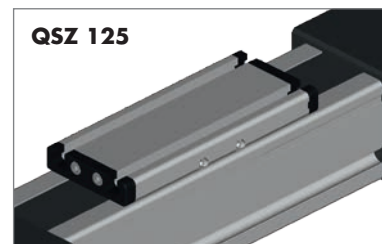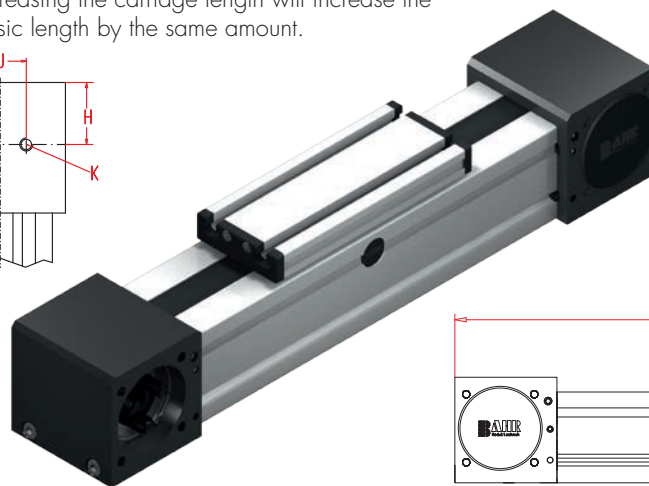

QSZ 125

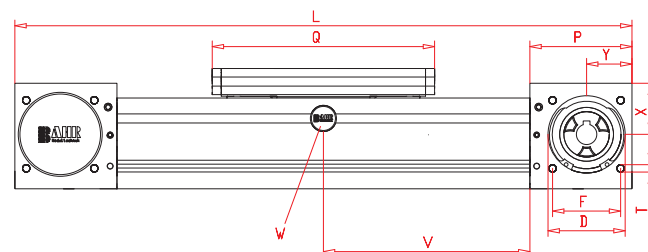

*For slide nuts refer to chapter 2.2 page 2

 $V = Q + 100 \text{ mm}$ $W = \text{servicing position}$

Size	Basic length L	A	B	C	D	E	F	G	H	J	K	N for	M for	P	Q	T	X	Y	Basic weight	Weight per 100 mm
QSZ 60	300	80	60	36	47	63	42	79	29,5	30	M 8	M 5	M 6	59	177	M 6	27	26	3,5 kg	0,55 kg
QSZ 80	430	100	80	50	68	93	60	106	47,5	40	M 10	M 6	M 8	90	232	M 8	45	40	10,4 kg	0,96 kg
QSZ 100	510	130	100	66	90	110	80	129	55	50	M 12	M 10	M 10	110	268	M 10	49	50	15,9 kg	1,47 kg
QSZ 125	570	160	125	82	110	134,5	100	157,5	65	60	M 12	M 10	M 12	130	300	M 10	60	60	30,5 kg	2,21 kg


Choice of guide body profile:

(0) Standard (1) corrosion-protected screws (4) expanded corrosion-protected version (depending on the availability of components)

Choice of carriages:

Size	Version 0		Version 1		Version 2		Version 3	
	Q	L	Q	L	Q	L	Q	L
60	177	300	152	280	242	370	302	430
80	232	430	196	390	312	510	390	585
100	268	510	260	500	362	610	448	690
125	300	570	260	530	365	635	467	740

Drive version:

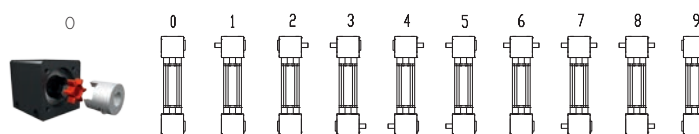

Size	Shaft ø h6 x length	Key
60	14 x 35	5x5x28
80	18 x 45	6x6x40
100	22 x 45	6x6x40
125	30 x 55	8x7x50

9 is as 0, but with coupling claws on both sides. The standard version is supplied without shaft. A shaft can be retrofitted by inserting it into the pulley bore and securing it with 2 locking rings or clamping sets (Size 100 + 125).

Belt table / Coupling claw

Code No.	Size	Belt	Pulley		Coupling
			mm/rev.	Number of teeth	
0 3	60	5M25	130	26	14
0 4	80	8M30	176	22	19
0 7	100	8M50	224	28	24
0 9	125	8M70	288	36	28

Basic length + stroke = total length

For additional accessories refer to chapter 2.2 – 3.2

QSZ 80 1 0 0 0 0 4 1 01500

Pos. 1 2 3 4 5 6 7

Sample ordering code:

QSZ80 with standard body profile, standard carriage, coupling claw on one side, 1070 mm stroke